



# WELCOME TO GJ MARKETING COMPANY

We wish to introduce ourselves as a reputed Organization engaged in the Sales & Services of all types of Office Automation Products like EPABX, FAX MACHINES, COPIERS, DIGITAL ISDN KEY TELEPHONE SYSTEMS, LCD Projectors, Security Intercom System (exclusively designed for Flats and Independent houses), VOIP IPBX with video and audio phones.

We are the Authorized Channel Partners for the leading brands like SIEMENS, HCL ERICSSON, PANASONIC, MATRIX, ACCORD, CANON, NEC-JAPAN and GRANDSTREAM – USA.

## ABOUT US

We wish to introduce ourselves as a reputed Organization engaged in the Sales & Services of all types of Office Automation Products like EPABX, FAX MACHINES, COPIERS, DIGITAL ISDN KEY TELEPHONE SYSTEMS, LCD Projectors, Security Intercom System (exclusively designed for Flats and Independent houses), VOIP IPBX with video and audio phones.

We are the Authorized Channel Partners for the leading brands like SIEMENS, HCL ERICSSON, PANASONIC, MATRIX, ACCORD, CANON, NEC-JAPAN and GRANDSTREAM – USA

Our other products are Access Control, Attendance Reader, Proximity, Billing Software, Video Conferencing Systems, Barcodes, Voice Mail, CTI, DECT, Voice Logger, IVR Networking, and CCTV Cameras, Burglary Alarms & Fire Alarms which give protection to your Offices & Houses, Water Dispensers and Data Turnkey Projects, etc.

In addition, we undertake Hospital projects, Pay Roll and other customized Billing Software.

After Sales, our service includes visit by our service engineers every month for attending to setback if any in installation. We also ensure that the communication in your office goes on uninterrupted, as we would provide you a stand-by during the warranty period, when your machine is required to be brought to our workshop for necessary repair.

Visit our website: [www.gjmarketing.co.in](http://www.gjmarketing.co.in). Please contact 98410 46028 at any time, for any clarification.

We wish to introduce ourselves that we are also manufacturers of PCB Boards and Electronic equipments.

We undertake Electronic Equipment Assembling, Testing & Calibration.

Manufacturing of Electronic Board (PCB) according to Customer design With component.

## SERVICES

We do services and troubleshooting for

- ❖ KTS / EPABX
- ❖ FAX & TELEPHONES
- ❖ PROJECTORS
- ❖ CCTV - CAMERA & DVR
- ❖ ACCESS & ATTENDANCE
- ❖ SECURITY ALARM
- ❖ CONFERENCE APPLIANCES

We also provide Access Controller as detailed below

Access Controller, Car Parking Controller, Finger Print Access Controller, Time Recording Terminal, Time Management Software, Proximity Reader, Bar Code Reader, Magnetic Reader, Converter and Communicator.

Please contact 98410 46028 at any time, for any clarification.

## OUR PRODUCTS

- ✓ KTS / EPABX
- ✓ FAX & TELEPHONES
- ✓ PROJECTORS
- ✓ CCTV - CAMERA & DVR
- ✓ ACCESS & ATTENDANCE
- ✓ SECURITY ALARM
- ✓ CONFERENCE
- ✓ PRINTERS
- ✓ VIDEO DOOR PHONES

# KTS / EPABX Smart communication Server

Empowered by Innovation

**NEC**

Smart Communication Server

## **SL1000**

**Affordable, Efficient and  
IP Enabled Solution**



## Design & Specifications & Capacity

### Terminal Design



### Specifications

AC Power Input	90 VAC to 264 VAC, 50/60Hz
Power Consumption	172VA @220V-AC (per KSU Cabinet)
Environment	Temperature: 0°C ~ 40°C (32°F ~104°F)
Humidity	10% ~ 90% (non-condensing)
Dimension	378mm(W) x 115mm(D) x 290mm(H) (for KSU)

### Capacity

Number of KSU (Key Service Unit / Main Cabinet)		1 KSU	2 KSU	3 KSU	4 KSU
Total Ports		66	132	198	230
Trunk Ports	Maximum Capacity	42	84	126	126
	Analog	16	32	48	48
	ISDN BRI	12	24	36	36
	ISDN PRI/E1 (2M)	30	60	90	90
	IP Trunk (SIP/H.323)	16	16	16	16
	External Paging Speaker	1	2	3	3
	External MOH (Music On Hold)	1	1	1	1
	BGM (Back Ground Music)	1	1	1	1
Extension Ports	Maximum Capacity	32	64	96	128
	Multi-Line Terminal	24	48	72	96
	Analog Terminal	32	64	96	128
	IP Terminal (IP/Multi Line/Standard-SIP)	16	16	16	16
	DSS Console	3	6	9	12
	Door phone	2	4	6	8
Virtual Extension Port		50	50	50	50
Power Failure Circuit		4	8	12	12
Door Relay		2	4	6	8
Ethernet Port		1	1	1	1
Built-in Answering Machine Channel		1	1	1	1
VRS (Voice Response System) Channel		4	16	16	16
In-Mail (Voice Mail) Channel		8	16	16	16
Analog Modem		1	1	1	1

## Terminal Lineup

### 12key Multiline Terminal

### 24key Multiline Terminal

### 24key IP Multiline Terminal



### 60key DSS Console

(For any Multiline Terminal)



### Other Terminals

#### Doorphone

- DP-D-1D/1A

#### Analog Terminal


- AT-35
- AT-40
- AT-45

### Green Initiative and Ecology System

NEC has always been at the forefront when it comes to technological innovations, many of which are related to environmental protection. Our green initiatives are responsible for lowering the energy consumption of products, complying with green manufacturing standards, eliminating chemicals that increase CO2 emissions and using chemicals that are environmentally safe (e.g. eliminating lead and mercury from circuit boards). We are committed to the effective application of an environmental management system that meets ISO 14001:2004 requirements. We are reducing our consumption of materials in all operations and re-use materials whenever possible, by promoting recycling and the use of recycled products.

- Designs and specifications of this product is subject to change without prior notice.
- System features and terminal models may vary between countries, please consult with your local supplier/dealer for its availability.

## Kts epabx

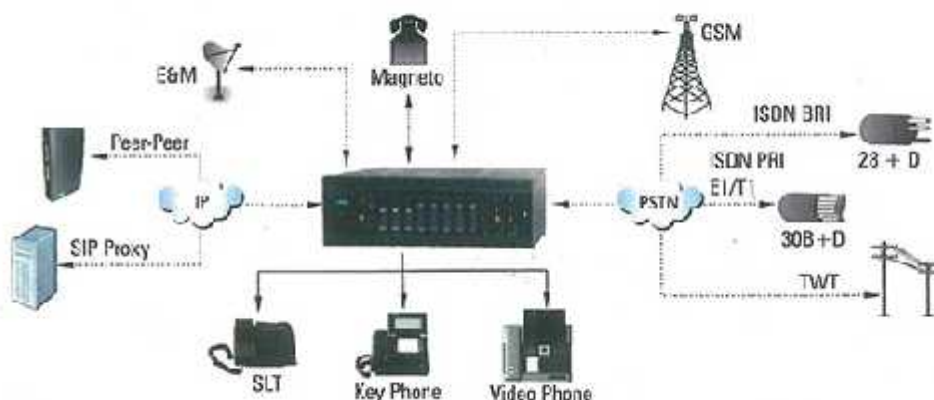

Head set

### TELECOM HEADSET

**PLANTRONICS**  
Single / Dual Head Set  
Noise Cancellation  
Compatible to  
any Analog /  
KTS Phone



IP Phone

### VoIP

Setu ATA2LL / 2S  
Setu VFX30L / VP236 S/P  
SIP based VoIP Adaptor  
FXS / FXO Ports  
2 / 8 SIP Accounts  
3 Party Conference  
Peer-to-Peer Calling



Eternity 16S

Eternity 3S

### ENTERPRISE PBX

**ETERNITY**  
3S/6S/10S/125/16S  
Universal Connectivity  
Range 16 to 512 Ports  
Multiple Conference  
ISDN BRI / T1 / E1/PRI  
E9 M/GSM/VIDEO Conference  
16 Port Voice Mail  
Hotel Features



Eon DSS72

Eon 45

Eon 48

### DIGITAL KEY PHONES

Eon 45/ Eon 45S/  
Eon 42P/Eon 48  
Direct Station Keys  
LCD Display  
Live Call Screening  
Room Monitor  
Message Paging  
Missed Call List



Vision 3085

#### **SMB PBX**

**Proton / Vision**

103 / 205 / 206 / 308 / 412 / 616  
Small and Medium Business PBX  
Compact and Cost Effective  
Caller ID / Non-Caller ID  
Auto Attendant  
Battery Charges  
Least Call Routing



Eon Soft

#### **SOFT CONSOLE**

**PC Based Digital**

**Key Phone**

Eon Soft

200SS Keys

DSS 64 Screens

Head Set Connectivity



M0H

#### **MUSIC-ON-HOLD**

Music or Jingle Player  
Compatible to any PBX  
240 Seconds Recording  
Compact Size



Door Phone

#### **DOOR PHONE**

Dual Purpose of  
Phone and a Bell



Simado FCT

#### **GSM FCT**

**Simado GDT 11 /**  
**GFX 11 / GFXD 1111S**  
**GFX 44 / GFX 888 / GBR 42**  
Single / Multi Port FCT  
Voice / Data Applications  
Compact and Sturdy  
Least Call Routing



Fax Machine

#### **FAX MACHINE**

**PANASONIC**

Thermal / Plain Paper /  
Laser Fax

Multi Function PC-Fax  
Answering Machine



Polycom

#### **CONFERENCE**

**PHONE**

**POLYCOM**

360° Professional  
Conference Phone



## INTOUCH

Intouch is all about being connected, feeling secure enabling convenience & enhancing the way of life at home. It is not just the basic Intercom System that allows the users to chat with neighbors. It is more of a communication solution designed to cater to all the unique requirements of a residential society, while at the same time enriching the total living experience of the homeowners by addressing all their communication & security needs individually.



## System Features

- Inter Flat Communication
- Flexible numbering as per flat numbers (upto 5 digits)
- Called Number Identification (Last 10 Calls) #
- Tone Pulse Dialing
- Independent Wakeup Alarm
- Barge-in with or without beep (by programmed extensions)
- Extension to Flat Call Barring
- Follow me for calls to be redirected
- All Party conference
- Do not Disturb (Programmable)
- Auto call Back
- Digital Display\*
- Auto Redial of Missed Call
- Calling Number Indication #
- Call Forward Indication #
- Digital Real Time Clock #
- Hotline between flat & security
- Off the hook Buzzer/Ringer \*
- Paging Port Facility \*

## Voice Features

- Caller Id device interfacing \*
- Passage Light Controller \*
- Cable Tamper Alert \*
- Panic Alert Button \*
- Electronic Door Sensor \*
- Panic Alert through Code #
- Super Cross Check/Recheck (of the visitor's credentials by security personnel)
- Emergency Alarm (upto 4 predetermined extensions)
- Unique Panic Alarm (to every flat by security)
- Gas Leak Detector \*
- Watch Man's Watch Dog
- Gas Leak Detector \*
- President Broadcasting
- Talking Caller ID \*
- Vendor Alarm with Voice \*
- # Available only with security if Digital Display is installed
- Optional items at additional cost

# FAX & TELEPHONES

---

## Fax

### Panasonic KX - FT 983 / 987



- Rugged Office Fax
- Navigator Key, Caller ID on Tel. line compatibility
- Paper Cutter
- Digital Ans. Inbuilt (FT 987)
- 64 Level Halftone
- Speed Dial 122 Nos.
- ADF Capacity 10 Sheets

### Panasonic Kx - FM 387 / KX - Fp 701 (without Pc Int.)



- 14.4 Kbps Modem Speed
- Pc Int. (PC Rcv./Scan/Print)
- Digital Answering Inbuilt
- Enhance Copier
- Easy Dial
- Document Memory 28\* Page
- Sequential Broadcast
- Speed Dial 100 Nos
- ADF Capacity 10 Sheets
- Consumable - Film Roll Film Roll

### Printer Range Panasonic KX-MB1500



- 18 CPM printer cum scanner
- Print / Copy / Scan
- Paper Handling : A4 / Letter
- Paper Capacity. 150 Sheets
- Print / Copy Resolution : 600 x 600 dpi
- Color Scan, Scan to PC

#### Cartridge

KX - FA 410 - Rs. 4,999/- (2,500 Copies)

### Panasonic KX - MB2010



- 24 CPM Printer Cum Scanner
- Print / Copy / Scan / Network
- Paper Handling : A4 / Letter / Legal
- Paper Capacity : 250 Sheets
- 20 Sheet ADF
- Print / Copy Resolution : 600x600 dpi
- Color add / FTP / SMB
- Network 10 Base - TX Ethernet



## Panasonic

KX-FLB772 (No handset and tray)



- Super G3 33.6 Kbps Modem Speed
- PC Fax / Scan / Laser Printer USB 2.0 interface
- Copier
- Document Memory Transmission 150\* Pages
- Document Memory Reception 170\* Pages
- 18 Pages Per Minute, 600 DPI laser Printer
- ADF Capacity - 20 Sheets
- Flatbed Colour Scanner
- Colour Scanning 600 x 600 DPI, 9600 DPI (interpolated)
- Toner - Rs. 5,200/- Dost Rs. 150\* / A4 (machine comes with a sample Toner)

## Panasonic

KX-MB1900



- 24 CPM Printer Cum Scanner
- Print / Copy / Scan
- Paper Handling : A4 / Letter / Legal (Mandling Tray)
- Paper Capacity : 250 Sheets
- Print / Copy Resolution : 600 x 600 dpi
- Color Scan, Scan to PC (Via USB)

### Consumables for

KX - MB 1900 / 2010 / 2030

Toner - Rs. 2,200/- (2,000 copies)

Drum - Rs. 4,200/- (6,000 copies)

No. Warranty for consumables number of copies yield depending upon the percentage of print area.

Usage of unauthorised refill will void warranty.

## Panasonic

KX-MB2030



- 24 CPM Printer Cum Scanner
- Print / Copy / Scan / Network / Fax / Handset
- Paper Handling : A4 / Letter / Legal
- Paper Capacity : 250 Sheets
- 20 Sheet ADF
- Print . Copy Resolution : 600 x 600 dpi
- Color Scan / Scan to PC
- Email add / FTP / SMB
- Network 10 Base - TX Ethernet
- Fax Phonebook 100 + 6 Stations

## Panasonic

DP-MB300



- 32 CPM Printer, Duplex Print / Copy
- Print / Copy / Scan / Network / Fax / Duplex
- Paper Capacity : 520 Sheets
- 50 Sheet ADF
- Print Resolution : 2400 x 1200 dpi
- Memory 64 MB
- Network 10 Base - TX Ethernet
- Fax Phonebook 300 Stations

Toner - Rs. 2,243/- (4,000 copies)

Drum - Rs. 4,025/- (7,000 copies)

# Projectors

---

## Projectors (BenQ / View Sonic)

### Features:

The PLED-W500 shines its innovative, stylish new look. Weighing only 1.18 kg (2.6 lbs) with dimensions of 214x164x42 mm (8.4" x 6.5" x 1.7"), lightweight, compact and ultra portable. 500 ANSI lumens, superior in the LED pocket projector category, provide 20,000 hours of brightness of energy and cost savings. The short throw lens projects a 33" screen from a 1m distance with a native 1280 x 800 WXGA resolution and a 16:10 aspect ratio. 2GB of onboard memory (1GB for file saving) allows you to store documents and multi-media files directly on the projector, while the built-in SD / SDHC card reader and Microsoft Office / PDF viewer displays your content without needing a PC - perfect for business presentations on the go. With USB and HDMI 1.3 support, simply connect the PLED-W500 with a PC, tablet or other device to enjoy a widescreen gaming or home theater experience.

Light and compact at 1.5kg

DLP/LCD/LCOS : DLP

Illumination : 500

Contrast Ratio : 10000:1

Aspect Ratio : 16:10



**VIEWSONIC PLED-W500 LED Full HD Pocket Projector**



**BenQ - PROJECTOR Gp10**

DIS Series Camera ( Operating temperature : -40° - 60°, 12VDC )

### **Dome Camera without IR**



**DS-2CE55A2P**

700 TVL, 1/3" DIS, Day & Night, 0.1 Lux/F1.2, 0.3 Lux/F2.2, 3-axis adjustment, 12 VDC, Wide operating temperature range (-40°~60°), 3.6 Lens

---

### **Varifocal Dome camera without IR**



**DS-2CE5582P-VF**

600 TVL, 1/3"DIS, Day & Night, 0.1 Lux/F1.2, 3-axis adjustment, 12 VDC, Wide operating temperature range (-40°~60°), Lens: 2.8 - 12mm /F1.4 Vari-focal Lens

### **Dome camera with IR**



**DS-2CE55A2P-IRP**

700 TVL, 1/3" DIS, 20m IR Distanc, ICR, 0.1 Lux/F1.2, 0.3 Lux/F2.2, 12 VDC, Smart IR, Wide operating temperature Range (-40°~60°), 3.6 Lens

---

### **Varifocal Dome camera with IR**



**DS-2CE5582P-VFIR3**

600 TVL, 1/3" DIS, 40m IR Distance, ICR, 0.1 Lux/F1.2, 12 VDC, 2.8 - 12mm/F1.4 Vari-focal Lens, IP66

### Bullet camera with IR



**DS-2CE1582P-IRP**  
(Plastic body, IP66)

600 TVL, 1/3" DIS, 20m IR Distance, ICR, 0.1  
Lux/F1.2, 12 VDC, Smart IR, Wide operating  
temperature Range (-40°~60°), IP66, 3.6mm Lens

### Varifocal Bullet camera with IR



**DS-2CE158MP-VFIR3**

600 TVL, 1/3" DIS, 40m IR Distance, ICR, 0.1  
Lux/F1.2, 12 VDC, 2.8 - 12mm / F1.4 Vari-focal Lens,  
IP66

### CCD Cameras



**DS-2CC1282P-IT3 (EXIR)**

600 TVL, 1/3" CCD, 40m IR Range, EXIR, Smart  
IR, 0.001 Lux / F1.2, 12 VDC, 12mm lens

### CCD Cameras



**DS-2CC12A2P-IT5 (EXIR)**

700 TVL, 1/3" CCD, 80m IR Range, EXIR, Smart  
IR, 0.001 Lux / F1.2, 12 VDC, 16mm lens

Make: Samsung /Honeywell/Altrox/cp plus/Hikvision /secure  
eye/Panasonic/Bpl

## DVR- (Intelligent DVR Integrated with Access Control)

### eSSL 9004

- Analog Video Input: 4-ch, BNC connector
- Audio output: 1-ch
- Recording resolution: CIF
- Hard disk capacity : Up to 4TB

### eSSL 9008

- Analog Video Input: 8-ch, BNC connector
- Audio output: 1-ch
- Recording resolution: CIF
- Hard disk capacity : Up to 4TB

### eSSL 9016

- Analog Video Input: 16-ch, BNC connector
- Audio output: 1-ch
- Recording resolution: CIF
- Hard disk capacity : Up to 4TB



## Series : DIS - 600

### EB-I-DIS-600-IR

- Image Sensor : 1/3" DIS Sensor
- Horizontal Resolution : 600 TV Lines
- Ir Range : Upto 15M
- Lens Type : 3.6mm Lens
- IR LEDS : 24pcs
- Housing : Metal

### ED-3-DIS-600

- Image Sensor : 1/3" DIS Sensor
- Horizontal Resolution : 600 TV Lines
- Lens Type : 3.6mm Lens
- Day Camera

- Horizontal Resolution : 600 TV Lines
- IR Range : Upto 15M
- Lens Type : 3.6mm Lens
- IR LEDS : 24pcs

### ED6DIS-600

- Image Sensor : 1/3" DIS Sensor
- Horizontal Resolution : 600 TV Lines
- Lens Type : 3.6mm Lens
- Day Camera



## ACCESS & ATTENDANCE

### iFace 201

CPU : Multi-Bio CPU - 800 MHZ  
Memory : 256MB Flash, 64MB SD RAM  
Camera: High Resolution Infrared Camera  
Display : 4.3" TFT Touch screen  
Face Capacity : 500 (1:N), 3000(1:1)  
ID Card Capacity : 10,000  
Transaction Capacity : 1,00,000  
Algorithm : Face 7.0 version  
Communication : TCP/IP, Rs232 Rs485, USB-host  
Identification Speed < = 2 Sec  
Operating Temperature : 0°C-45°C  
Operating Humidity : 20% - 80%  
Dimension (LxWxD) : 193.6 x 146.8 x 101 mm  
Access Control : Supports EM Lock, Exit button  
wiegand Signal : Output  
Optional Functions : Self Service Query, 9 digit user Id,  
Automatic Status Switch, Workcode, T9 Input



E9



iFace 202

### Multi-biometric Identification Time Attendance and Access Control Terminal

### iFace 202

CPU : Multi-Bio CPU - 800 MHZ  
Memory : 256 MB Flash, 64MB SD RAM  
Camera: High Resolution Infrared Camera  
Display : 4.3" TFT Touch screen  
Face Capacity : 500 (1:N), 3000(1:1)  
Fingerprint Capacity : 2000  
Transaction Capacity : 1,00,000  
Inbuilt Proximity Card Reader  
Algorithm : Face 7.0 version & Fingerprint 10.0 version  
Communication : TCP/IP, Rs232 Rs485, USB-host  
Identification Speed < = 2 Sec  
Operating Temperature : 0°C-45°C  
Operating Humidity : 20% - 80%  
Power supply : 12V DC, 3A  
Dimension (LxWxD) : 193.6 x 146.8 x 101 mm  
Access Control : Supports EM Lock, Exit button  
wiegand Signal : Output  
Optional Functions : Self Service Query, 9 digit user Id,  
Automatic Status Switch. Workcode. T9 Input



## K30 Pro

- Fingerprints Templates : 1000
- Transaction Storage : 100000
- Card Capacity : 1000
- Push Data : Yes
- Battery : Inbuilt
- Support exit readers : Push Button



Fingerprint



RFID



Battery



Access

## K21 Pro



Fingerprint

- Fingerprints Templates : 1000
- Transaction Storage : 1,00,000
- Push Data : Yes
- Standard Features : Self Service Query, SSR Recorder, Automatic Status Switch, DST, T9 Input

Make: ESSL/BIOMAX/TIME WATCH/SECUREYE



## Security Alarm

Make: Fermax /Hifocus

REF. No	DESCRIPTION	
F05021	1 WAY SMILE 7" COLOUR VIDEO KIT	
F04961	1 WAY LOFT COLOUR VIDEO KIT	
F04950	1 WAY I LOFT COLOUR VIDEO KIT	
F01401	1 WAY VIDEO WAY KIT	



HF-FNH-4

- \*4.3" TFT color screen with low power consumption, no radiation with high definition.
- \*Intercommunication between indoor unit and outdoor unit.
- \*Hands-free intercommunication.
- \*Monitoring the outdoor.
- \*Smart unlocking door option.
- \*Brightness, chroma and ring adjustable.
- \*8-chord melody rings for option.
- \*DIY installation.
- \*Gain control: Automatic



HF-SNH-7

- \*7" TFT color screen with low power consumption, no radiation with high definition.
- \*Connect an external CCTV camera.
- \*Intercommunication between indoor unit and outdoor unit.
- \*Hands-free intercommunication with feather touch keys.
- \*Monitoring the outdoor.
- \*Smart unlocking door option.
- \*Brightness, chroma and ring adjustable.
- \*8-chord melody rings for option.
- \*DIY installation.
- \*Gain control: Automatic



HF-SMH-7

- \*7" TFT color screen with low power consumption, no radiation with high definition.
- \*2GB memory card, video/ snapshot recording function.
- \*Intercommunication between indoor unit and outdoor unit.
- \*Hands-free intercommunication with feather touch keys.
- \*Monitoring the outdoor.
- \*Smart unlocking door option.
- \*Brightness, chroma and ring adjustable.
- \*8-chord melody rings for option.
- \*DIY installation.
- \*Gain control: Automatic



HF-37M2

- \*7" TFT color screen with low power consumption, no radiation with high definition.
- \*Connect an external CCTV camera.
- \*Intercommunication between indoor unit and outdoor unit.
- \*Hands-free intercommunication with feather touch keys.
- \*Monitoring the outdoor with two different area.
- \*Smart unlocking door option with two different location.
- \*Brightness, chroma and ring adjustable.
- \*8-chord melody rings for option.
- \*DIY installation.
- \*Gain control: Automatic

# ALARAM SYSTEM

## ALARM SYSTEM

• Best Quality • Original Parts • Easy Installation



## Conference

### Conference

#### Audio Conference Phone



- Full duplex conference
- Multi party Conference
- Echo cancellation
- Resist interference from mobile

#### Video Conference Phone



Polycoms latest view station allow users to call upto 4 sites at the same time for a cost effective meeting / conference there by reducing the companies main travelling expenditure drastically.

- High quality enhanced video, Picture in Picture (PIP)
- Dual Monitor Emulation for displaying two images on a single monitor
- Available on IP and GSN, Voice Activated Switches (VAS)
- NTSC, PAL, SXGA, XGA, SVGA, VGA
- 65" field of view, Total field of view 265°, 12x Zoom, Auto Focus

#### Panasonic Panels Full HD LCD Display



- Full HD PID Panel - Optimal for signage applications
- Wide range of input terminals
- Stylish and energy saving design

#### Weather Proof LCD Display



- IP-66 - Compliant Dustproof and Water Resistant Performance
- Trans reflective LCD Panel - High Visibility in Bright Places
- Robust Operation Even Under Adverse Conditions



## PA Systems



Amplifier - 50 to 700 Watts



Professional our / in door speakers



Indoor column speakers



Outdoor horn speakers



False ceiling speakers



Wireless mic



Wired mic

### SSA-350

AC & 36V DC Operation



350 WATTS ■ 7 Mic & 2 Aux Inputs

#### SPECIFICATIONS

Power Output : 350W RMS at 10% THD / 450W RMS Max. Tone Controls : Bass: ± 10dB at 100 Hz Treble: ± 10dB at 10kHz  
Input Channels : Min - 7xMin 0.8V/10k 7x0 Speaker Output : 4Ω, 8Ω, 16Ω & 100V

### PAM-3001Z

AC & 24V DC Operation



325 WATTS ■ 5 Mic, 3 Aux & 1 Telephone Inputs

#### SPECIFICATIONS

Power Output : 325W RMS at 10% THD / 415W RMS Max. Freq. Resp. : 50-15,000Hz ± 3dB  
Input Channels : Mic : 3xMic 0.65mV/1k 7x0 Tone Controls : Bass: ± 10dB at 100 Hz Treble: ± 10dB at 10kHz

**SSA-100M**

AC &amp; 24V DC Operation

**100 WATTS ■ 5 Mic & 2 Aux Inputs****SPECIFICATIONS**

Power Output : 100W RMS at 10% THD / 130 RMS Max.	Tone Controls : Bass : +10dB at 100Hz Treble : +10dB at 10kHz
Input Channels : Mic : 5x65mV/4.7kΩ Aux : 2x150mV/470kΩ	Speaker Output : 4Ω, 8Ω, 16Ω, 70V & 100V
Dim. / Wt. : 150mm x 115mm x 25mm	
Freq. Resp. : 50-15,000Hz ± 3dB	

**ADM-511**

Freq. Resp. : 50-15,000 Hz  
Sensitivity : 2.0mV/Pa  
Impedance : 600Ω

Intelligible, crisp and bright sound suitable for all type of PA applications.

Supplied with quick detachable holder with 3-pin professional XLR connector & 6 mtrs. twin core shielded low noise cable.

**AUD-59XLR**

Freq. Resp. : 100-10,000 Hz  
Sensitivity : 2.5mV/Pa  
Impedance : 600Ω

Attractive appearance, low cost PA Microphone. Supplied with quick detachable holder with 3-pin professional XLR connector & 4.5 mtrs. shielded low noise cable.

**CS-663T PA Ceiling Speakers**

Input Power : 6W RMS
Power Taps : 6/3/1.5W on 100V
Freq. Resp. : 60-15,000Hz
SPL (1W/1m) : 92dB
Dim. / Wt. : ø209xh75mm/0.85kg.

**AM-21S**

20 WATTS ■ Shoulder Sling Type

**PA Megaphone**

Dry Cell & 12V Car Battery operation. All ABS body, sturdy yet light weight. Build-in Siren. Clear sound, long range & efficient design. Microphone with Volume Control & Press-to-Talk Switch.

Power Output : 16W Rated / 20 W Max.
Voice Range : 0.4 km (1km in Quiet Area)
Power Source : 12V DC, 8 x UM-2 Cells/ Car Battery
Microphone : Unidirectional Dynamic
Dim./Wt. : ø220mm, L370mm / 2.2kg

**WS-661T PA Wall Speakers**

Input Power : 6W RMS
Power Taps : 6/3/1.5W on 100V
Freq. Resp. : 60-15,000Hz
SPL (1W/1m) : 92dB
Dim. / Wt. : W262xH262xD128/1.50kg.

**AHP-1200**

Professional Stereo Headphones

**SPECIFICATIONS**

Driver  
Frequency Range  
Impedance  
Max. Power  
Cable

**AHP-1200**

Neodymium Dynamic Element 50mm Dia  
20-20,000Hz  
45Ω  
2000mW  
1.2m stretchable spring cable

**AHP-600 Headphones**  
Multipurpose Stereo Headphones**AHP-600**

Neodymium Dynamic Element 40mm Dia  
20-20,000Hz  
32Ω  
100mW  
3m